


Digital Signage Conferencing Fairs & Events

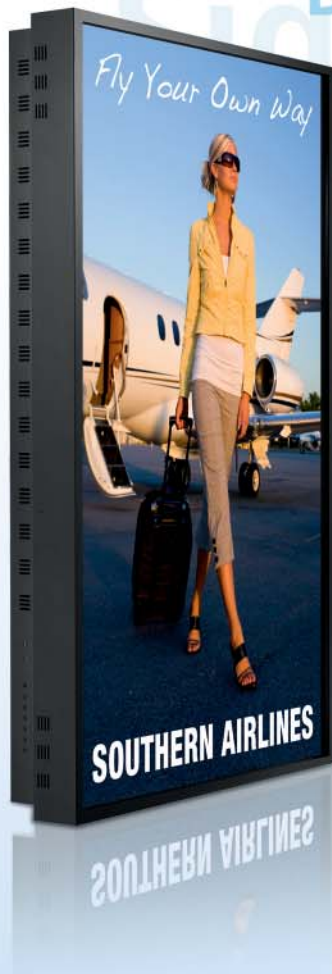

Key Features

- 40" LCD TFT public display
- out-of-home media panel
- 1920 x 1080 resolution
- 3000:1 high contrast
- 700 cd/m² high brightness
- 178° (h/v) wide viewing angle
- array of connectors
- metal frame housing
- narrow bezel
- built-in video wall function
- portrait/landscape orientation
- auto cooling system
- remote control & maintenance

D407ML – Metal Frame Type

Since the mid-90s, the name HYUNDAI has been synonymous with the design and production of state-of-the-art display technologies. Advanced devices offering sophisticated design and supreme image quality – with "built-in" future-proofing.

By using special "Out-Of-Home" LCD panels HYUNDAI IT's indoor public displays ensure the presentation of digital signage contents in a pin sharp, high bright and brilliant picture quality. Meeting all necessary technical requirements for professional display equipment these enhanced displays ensure a reliable and failure-free operation in any kind of indoor environment.



Display Panel			Panel Technology		LCD TFT PVA				
			Screen Size (inch cm)		40" 101,6				
			Active Display Area (mm)		885.6 x 498.15				
			Number of Pixels		1920 x 1080 (WUXGA)				
			Aspect Ratio		16 : 9				
			Display Colors		16.7 Mil.				
			Brightness (cd/m²)/(typ)		700				
			Contrast Ratio		3000 : 1				
			Response Time (ms, GTG)		8				
			Viewing Angle (H/V)		178°/178°				
			Life Time		50,000h				
			Housing		black powder coated metal				
Resolution			Monitor		1920 x 1080				
			DTV (without tuner)		1080p				
Connectivity & Control			Input		VGA (15pin D-Sub)		1		
					HDMI		1		
					Composite Component (BNC)		1 1		
					Audio: PC Component Composite		1 1 1		
					RS232C		1		
					Output		VGA (15pin D-Sub)		1
			DVI (Connected type HDMI)				1		
			Composite Component (BNC)				1 1		
			RS-232C				1		
			Speaker (ready)				1		
			Integrated Video Wall Function (Multi-Screen)				HDMI, VGA (15pin D-Sub), Component (BNC), Composite (BNC)		
			Power Requirement			Input Voltage		100 – 240VAC	
						Consumption (typ) (W)		220	
						DPMS (max.)		1	
			Auto Cooling System				yes (1EA)		
			Auto Power Control (DPMS)				yes (optional set-up)		
Feature			Tempered Glass		Option (Model: D407MLG)				
			Touch Screen		Option (Model: D407MLI)				
Mechanical			Dimension (mm)		Set (W x H x L) (mm)		916 x 528.5 x 123		
					Bezel Size (U/D/L/R) (mm)		13.3/ 13.3/ 13.3/ 13.3		
					Packed (W x D x H) (mm)		1032 x 647 x 244		
					Wall Mounting Hole (W x H mm)		400 x 200		
			Weight (kg)			Set (kg)		28	
Packed (kg)		32,5							
Approvals			EMI/EMC Safety				FCC, CE cTUVus, TUV, CB		
Environmental Conditions			Temperature Humidity				0° – 40° 20% – 80%		
OSD Languages							10		
Accessories							power cord, HDMI cable, D-Sub cable, user manual, remote control		
Warranty							Standard: 2 years, less than 18 hours usage per day		
EAN Code							880 909 374 643 5		

Technical details are subject to change without further notice. Errors excepted. Version: as of November 2009.